

# Neutralizer Kit with Pump

**A2123610**

**Submittal Data**



Date:

Project #:

Engineer:

Project Name:

Prepared By:

Location:


Bid Date:

Contractor:


## Features

- Neutralization and removal in one tank
- 40 Gallon per hour
- 18 feet of lift at max design flow rate
- High level float for hook up to alarm
- Low profile for appliances with low drain
- Includes initial charge of media
- 4.8 gallon tank with baffles to channel flow
- ETL Listed
- Pump certified to CAN/CSA std C22.2 no.108
- Pump conforms to ANSI/UL std 778.
- Submerged pump is self-priming
- 120VAC 60Hz, 87W, 0.89A, 6-ft cord

## Pump Performance

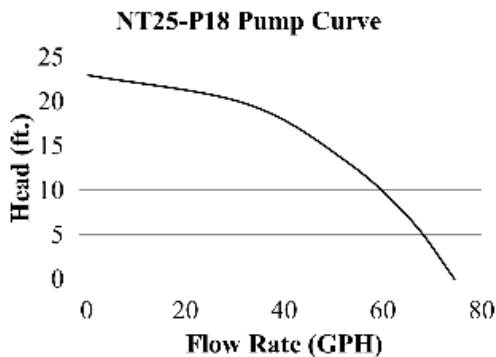

## Dimensions

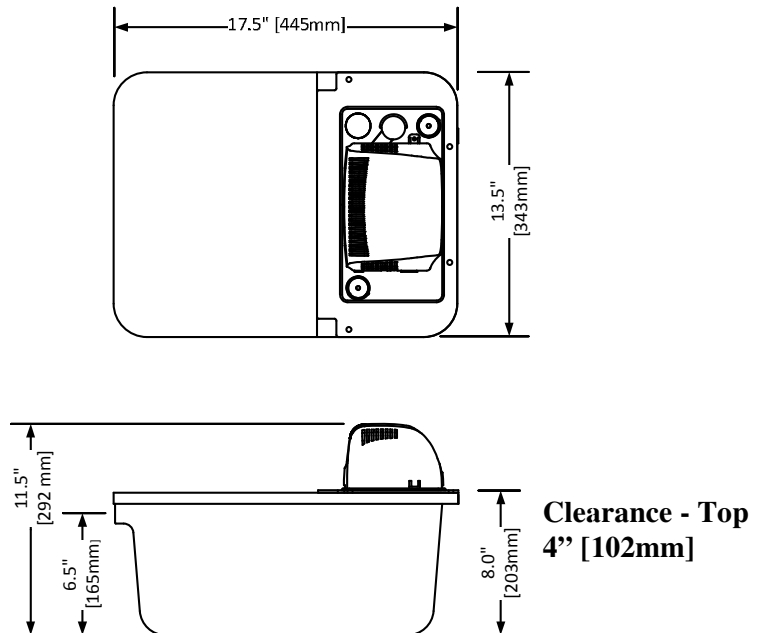

Laars Heating Systems Company reserves the right to change specifications, components, features, or to discontinue products without notice.