

STANDARD FEATURES

- ASME code section VIII, Div. 1
- 125 psi design pressure
- 4" Base ring

TANK MATERIALS ¹

- ☐ Carbon steel (standard)
with red oxide primer coating
- ☐ 316L stainless steel
- ☐ Duplex stainless steel
- ☐ Epoxy-lined

OPTIONS ¹

- ☐ 150 psi design pressure
- ☐ Insulating foam with topcoat
- ☐ Insulated steel jacket
- ☐ Hand hole (4" x 6")
- ☐ Manway (12" x 16")

1. Not all materials/options are available
on all sizes. Check with factory.

NOTES**PROJECT**

Customer _____

Date _____

Customer P.O. # _____

Hydraulic Separators

Submittal Data


Model Number*	Capacity Actual	Capacity Nominal	(A) Overall Height***	(B) Diameter** Bare Tank
	gallons	gallons	inches	inches
HTV * -18-041	40	45	45	18
HTV * -24-045	80	88	49	24
HTV * -30-045	120	138	49	30
HTV * -30-075	210	231	79	30
HTV * -36-072	285	317	76	36
HTV * -42-072	385	432	76	42
HTV * -42-084	453	498	88	42
HTV * -48-096	675	752	100	48
HTV * -48-120	860	940	124	48
HTV * -60-096	1000	1100	102	60

Model Number*	(C) Lower Fitting Height	(D) Upper Fitting Height	(E) Fitting Type / Size	Weight
	inches	inches		lbs
HTV * -18-041	14.25	33.75	2" NPT	185
HTV * -24-045	16.75	36.25	3" NPT	310
HTV * -30-045	16.75	36.25	3" NPT	310
HTV * -30-075	16.75	62.25	3" NPT	500
HTV * -36-072	24.5	55.5	4" Flange	760
HTV * -42-072	27	53	6" Flange	1000
HTV * -42-084	27	64	6" Flange	1022
HTV * -48-096	29	75	6" Flange	1850
HTV * -48-120	29	99	6" Flange	1925
HTV * -60-096	31.25	76.75	6" Flange	2400

* N = Carbon steel, 2 = Duplex stainless steel, 3 = 316L stainless steel

** Topcoated diameter, add approx 4½" - Jacketed diameter, add 4"

*** Topcoated height, add approx 2¼" - Jacketed height, add 4"

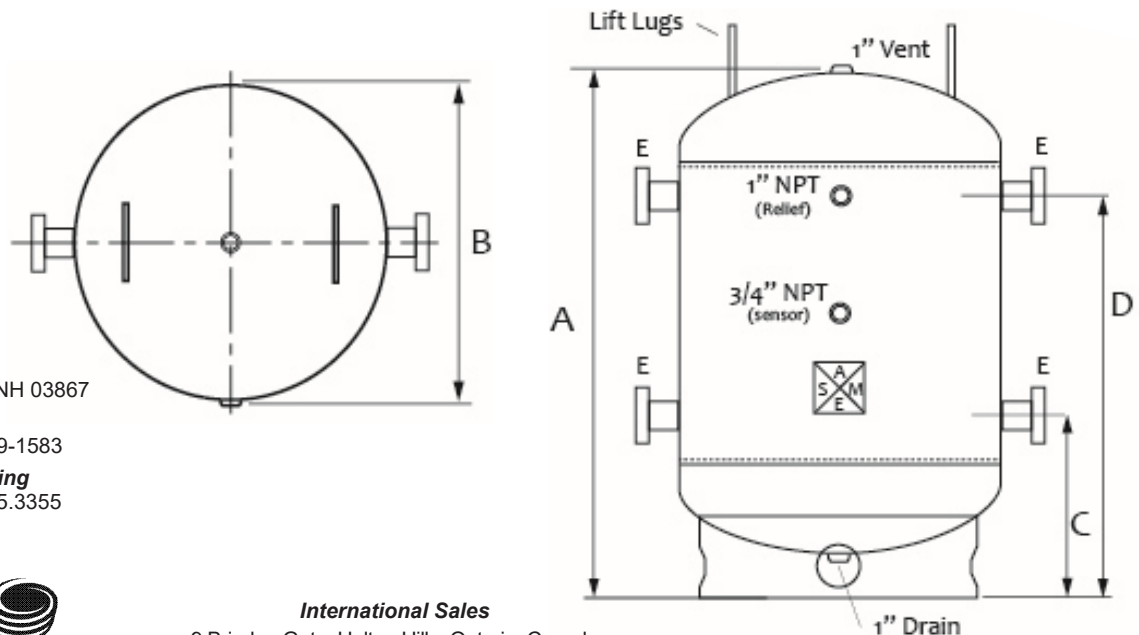

Headquarters
20 Industrial Way, Rochester, NH 03867
Sales, Service
800.900.9276 • Fax 800-559-1583
Applications Engineering
603.335.6300 • Fax 603.335.3355

LAARS
Heating Systems Company
A subsidiary of **BRADFORD WHITE** Corporation

International Sales
9 Brigden Gate, Halton Hills, Ontario, Canada
L7G 0A3 (905)203-0600 Fax: (905) 636-0666

www.Laars.com
Litho in U.S.A. © Laars Heating Systems 23-08 Document 4279D