


Gateway for Integrated Control System

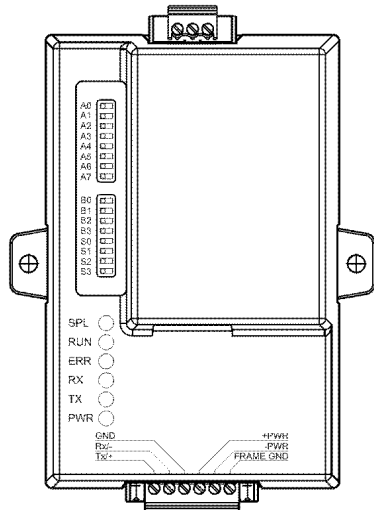

MagnaTherm / MagnaTech FT	CA010317
MagnaTherm / MagnaTech HTD	CA010309
MagnaTherm / MagnaTech 5:1	CA010313
OmniTherm / OmniTech	CA010313
NeoTherm XTR / Brute XTR	CA020500
NeoTherm / Brute	CA010301

Date:

Project #:

Engineer:

Project Name:

Prepared By:

Location:

Bid Date:

Contractor:

Submittal Data

Specifications

Power Requirements		9-30VDC or 12-24VAC	
Operating Temperature		-40°F to 167°F (-40°C to 75 °C)	
Operating Humidity		5-90% RH, non-condensing	
Connections	LonWorks	One 6-pin Phoenix connector with: RS-485 port (+ / - / gnd) Power port (+ / - / Frame-gnd)	
		One 2-pin Phoenix connector with: One FTT-10 LonWorks port One Ethernet 10-100 BaseT port	
Weight		0.4 lbs (0.2 kg)	
Dimensions		4.5 L x 3.2 W x 1.6 H inches (11.5 x 8.2 x 4.0 cm)	
Surge Suppression		EN61000-4-2 ESD EN61000-4-3 EMC EN61000-4-4 EFT	
Approvals		LonMark Certified CE Certified UL 916 Approved WEEE Compliant REACH Compliant	RoHS 3 Compliant EN 50491-3 and CSA C22-2 Standards FCC Class A Part 15 DNP 3.0 Conformance Tested CSA 205 Approved

The Manufacturer reserves the right to change specifications, components, features, or to discontinue products without notice.
LonWorks® is a registered trademark of Echelon Corp.

Dimensions

