

Gateway for Integrated Control System



BACnet MS/TP, BACnet IP

Metasys N2, Modbus TCP

MagnaTherm / MagnaTech FT	CA010316
MagnaTherm / MagnaTech HTD	CA010308
MagnaTherm / MagnaTech 5:1	CA010312
OmniTherm / OmniTech	CA010312
NeoTherm XTR / Brute XTR	CA020400
NeoTherm / Brute	CA010300

Date:

Project #:

Engineer:

Project Name:

Prepared By:

Location:

Bid Date:

Contractor:

Submittal Data


Specifications

Power Requirements		Input Voltage: 9-30VDC or 24VAC Current Draw: 24VAC 0.125A Max Power: 3 Watts 9-30VDC 0.25A @ 12VDC	
Operating Temperature		-4°F to 158°F (-20°C to 70°C)	
Operating Humidity		10-95% RH Non-condensing	
Connections	BACnet	One 3-pin Phoenix connector with: RS-485/RX-232 port (Tx+/Rx-/gnd) One 3-pin Phoenix connector with: RS-485 (Tx+/Rx-/gnd) One 3-pin Phoenix connector with: Power port (+/-/Frame-gnd)	
	Metasys	One Ethernet 10-100 BaseT port	
Weight		0.4 lbs (0.2 kg)	
Dimensions		4 x 1.1 x 2.7 inches (10.16 x 2.8 x 6.8 cm)	
Approvals		BACnet Testing Labs (BTL) B-ASC - RER Series CE and FCC Class B & C Part 15 UL 60950-4 WEEE Compliant	IC Canada REACH Compliant RoHS 3 Compliant DNP 3.0 Conformance Tested UKCA Compliant
Wi-Fi 802.11 b/g/n		Frequency: 2.4 GHz Antenna Type: SMA	Channels: 1 to 11 (inclusive) Encryption: TKIP, WPA & AES

The Manufacturer reserves the right to change specifications, components, features, or to discontinue products without notice.

BACnet® is a registered trademark of ASHRAE. Metasys® is a registered trademark of Johnson Controls, Inc.

Dimensions

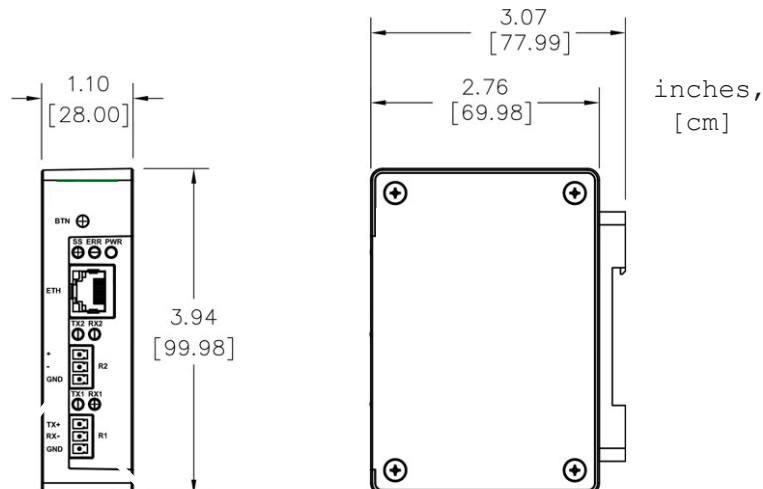

7037B-10

Page 1 of 1