


MAGNATHERM® HTD

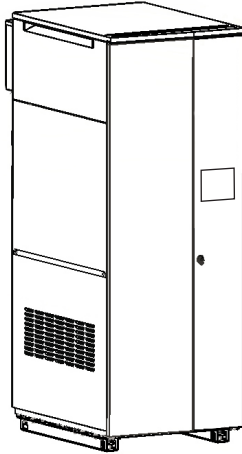

Volume Water Heater

MGV | Volume Water Heater

Indoor / Outdoor, Sizes 1600 - 4000

Date:

Project #:

Engineer:

Prepared By:

Bid Date:

Submittal Data



Project Name:

Location:

Contractor:

Standard Features

- ASME "HLW" stamp
- 160 psi maximum working pressure
- Meets NSF/ANSI-372 Low Lead Content certification
- Certified for Category II and Category IV vent systems
- Indoor / Outdoor
- Low NOx system exceeds the most stringent regulations for air quality - 9ppm NOx
- High condensing efficiency
- Modulation down to 5% of full fire (20:1 turndown)
- Sophisticated gas/air valve allows for constant control of modulation
- Tru Trac™ real-time O₂ sensing maintains efficiency throughout the modulation range
- Sealed combustion chamber
- Pre-mix stainless steel burner
- Stainless steel heat exchanger with welded construction
- Electronic PID modulating control with large touchscreen and color display
- Multiple independent heat demands
- Controller cascades with up to eight MagnaTherm heaters equipped with Laars Linc control
- Accepts 4-20ma or 0-10VDC external modulation or external set point control
- Modbus RTU & BACnet MSTP on board
- Domestic water pump control with time delay
- Sensor for DHW tank
- Horizontal or vertical direct vent
- Vent and air pipe lengths of up to 100 equivalent feet (each)
- "Knock-down" feature: Removable top section for easy handling and installation
- High and low gas pressure switches
- Vent temperature cutoff
- Normally open alarm contact
- Air filter
- Built-in condensate trap
- Water flow switch
- Temperature & pressure gauge
- Low water cutoff
- 125 psi (861kPa) ASME rated pressure relief valve
- Groove lock fittings (optional flange adapter)
- Burner site glass
- 10-Year limited warranty

Heater Data

Number of Units

Fuel

☐ Natural

Voltage

☐ 120V, single ph (1600-2000)

☐ 208V, single ph (1600-2000)

☐ 220/240V, single ph (1600-2000)

☐ 208V, three ph (2000-4000)

☐ 480V, three ph (2000-4000)

☐ 600V, three ph (2000-4000)

Factory Mounted Options

- ☐ ASME CSD-1
- ☐ ASME "H" Stamp (instead of standard "HLW" Stamp)
- ☐ BACnet IP gateway
- ☐ LonWorks gateway

- ☐ Additional auto & manual reset high limit switches
- ☐ Alarm bell with silence switch
- ☐ Groove lock to flange connections

- ☐ 125 psi pressure relief valve (std)
- ☐ 30 psi pressure relief valve
- ☐ 50 psi pressure relief valve
- ☐ 60 psi pressure relief valve
- ☐ 75 psi pressure relief valve
- ☐ 150 psi pressure relief valve



Accessories for Field Mounting

☐ Gateway for BACnet IP	☐ Screen for vertical stainless steel vent	☐ Screen/adaptor for vertical or horizontal PCV ducted air
☐ Gateway for LonWorks	☐ Screen for horizontal CPVC vent	☐ Screen for horizontal galvanized or vertical ducted air
☐ Condensate neutralizer	☐ Screen for vertical CPVC vent	☐ Screen for horizontal polypropylene ducted air
☐ Condensate neutralizer with pump	☐ Screen for horizontal polypropylene vent	☐ Screen for vertical polypropylene ducted air
☐ Vent terminal for outdoor unit	☐ Screen for vertical polypropylene vent	
☐ Screen for outdoor unit air		
☐ Vent terminal for horizontal stainless steel vent		

Sizing Data

	Model	Minimum Input Rate		Maximum Input Rate		Minimum Output Rate		Maximum Output Rate		Thermal Efficiency
		MBH	kw	MBH	kw	MBH	kw	MBH	kw	
☐	1600	80	23.4	1600	469	76	22.3	1520	445	96
☐	2000	100	29.3	1999	586	95	27.8	1895	555	96
☐	2500	125	36.6	2499	732	119	34.9	2374	696	96
☐	3000	150	44.0	3000	879	141	41.3	2814	825	95
☐	3500	175	51.3	3500	1025	164	48.1	3276	960	96
☐	4000	200	58.6	4000	1172	190	55.7	3800	1113	96

	Model	Product Weight		Operating Weight		Shipping Weight		Water Content	
		lbs	kg	lbs	kg	lbs	kg	gal	l
	1600	1410	640	1582	718	1610	731	22	83
	2000	1410	640	1582	718	1610	731	22	83
	2500	1810	822	2064	937	2010	913	31	117
	3000	1810	822	2064	937	2010	913	31	117
	3500	2325	1056	2789	1266	2525	1146	56	212
	4000	2325	1056	2789	1266	2525	1146	56	212

Clearances

	Clearance to Combustibles		Suggested Service Clearance	
	inches	cm	inches	cm
Front	18	46	24	61
Back	11	28	24	61
Left	4	10	8	20
Right	4	10	8	20
Top	1	2.5		

Suggested Top Service Clearance by Model

1600/2000		2500/3000		3500/4000	
inches	cm	inches	cm	inches	cm
12	30	15	38	24	61

Electrical Data

Size	1600			2000					
Voltage	120	240/220	208 1Φ	120	240/220	208 1Φ	208 3Φ	480	600
FLA	6.2	3.4	3.6	18.6	10.1	12.5	7.5	3.5	4.4
MCA	7.8	4.2	4.5	23.3	12.7	15.6	9.4	4.4	5.5
MOP	20	15	15	30	25	25	15	15	15

Size	2500/3000			3500/4000		
Voltage	208 3Φ	480 3Φ	600 3Φ	208 3Φ	480	600
FLA	9.5	4.4	3	9.9	3.6	4.5
MCA	12	6	4	12	5	6
MOP	20	15	15	20	15	15

Full Load Amperage
Minimum Circuit Ampacity
Max Over-current Protection

Vent System

Model	Vent / Air Connector Size		Air Pipe Size		Maximum Ducted Air Pipe Length		Category IV Vent Pipe Size		Maximum Category IV Vent Pipe Length		Typical Category II Vent Pipe Size***	
	inches	cm	inches	cm	ft**	m	inches	cm	ft**	m	inches	cm
1600	6	15	6	15	100	30.5	6	15	50	15.2	14	36
							8*	20*	100	30.5	14	36
2000	8	20	8	20	100	30.5	8	20	100	30.5	14	36
2500	8	20	8	20	100	30.5	8	20	50	15.2	18	46
							10*	25*	100	30.5	18	46
3000	10	25	10	25	100	30.5	10	25	100	30.5	18	46
3500	10	25	10	25	100	30.5	10	25	50	15.2	22	56
							12*	30*	100	30.5	22	56
4000	12	30	12	30	100	30.5	12	30	100	30.5	22	56

*A vent increaser at the boiler outlet is required

**Equivalent Feet: To calculate maximum equivalent length, measure the linear feet of the pipe and add 5 feet (1.5m) for each elbow used.

***Category II: Category II pipe size may vary. Draft must remain between -0.01 and -0.001" w.c..

Notes:

- Installations in the U.S. require exhaust vent pipe that is CPVC complying with ANSI/ASTM D1785 F441, stainless steel complying with UL1735, or polypropylene complying with ULC S636.
- Installations in Canada require exhaust vent pipe that is certified to ULC S636.
- Intake (air) pipe must be PVC or CPVC that complies with ANSI/ASTM D1785 F441, ABS that complies with ANSI/ASTM D1527, stainless steel, or galvanized material.

Flow and Headloss

Water Hardness

1-10 grains per gallon

Model	Flow Rate	Temp Rise	Headloss*	Flow Rate	Temp Rise	Headloss*
	GPM	°F	Ft	LPM	°C	m
1600	152	20	31.0	525	11.1	10.1
2000	152	25	33.0	575	14	10.1
2500	190	25	33.7	719	13.9	10.0
3000	190	30	36.0	719	17	11.0
3500	222	30	30.6	839	17	9.0
4000	224	34	30.0	848	19	9.1

Allowable pH: 6.5 to 9.5

*Headloss is for the heater only (no piping)

Water Hardness

11-15 grains per gallon

Model	Flow Rate	Temp Rise	Headloss*	Flow Rate	Temp Rise	Headloss*
	GPM	°F	Ft	LPM	°C	m
1600	177	17	41.0	670	9.4	12.5
2000	177	21	43.9	670	12	13.4
2500	220	21	46.0	833	11.7	14
3000	220	26	46.0	833	14	14
3500	266	25	40.6	1007	14	12
4000	266	29	41.2	1007	16	12.6

Allowable pH: 6.5 to 9.5

*Headloss is for the heater only (no piping)

Recovery Data

Temperature Rise

Model	40°F	50°F	60°F	70°F	80°F	90°F	100°F
	GPH	GPH	GPH	GPH	GPH	GPH	GPH
1600	4562	3649	3041	2607	2281	2027	1825
2000	5702	4562	3802	3258	2851	2534	2281
2500	7128	5702	4752	4073	3564	3168	2851
3000	8553	6843	5702	4888	4277	3802	3421
3500	9979	7983	6653	5702	4989	4435	3992
4000	11405	9124	7603	6517	5702	5069	4562

Temperature Rise

Model	22°C	28°C	33°C	39°C	44°C	50°C	56°C
	LPH	LPH	LPH	LPH	LPH	LPH	LPH
1600	17268	13815	11512	9868	8634	7675	6907
2000	21585	17268	14390	12335	10793	9594	8634
2500	26982	21585	17988	15418	13491	11992	10793
3000	32378	25902	21585	18502	16189	14390	12951
3500	37775	30219	25184	21584	18885	16788	15111
4000	43171	34537	28781	24669	21585	19187	17268

Dimensional Data

Model	A	B	C	D	E	G	H	J
1600	29.3 (75)	79.8 (203)	38.0 (96)	57.5 (147)	49.8 (126)	60.8 (154)	2.6 (7)	8.4 (21)
2000	29.3 (75)	79.8 (203)	38.0 (96)	57.5 (147)	49.8 (126)	60.8 (154)	2.6 (7)	8.4 (21)
2500	30.8 (78)	87.0 (221)	41.5 (105)	60.5 (154)	60.8 (154)	71.0 (180)	4.0 (10)	9.8 (25)
3000	30.8 (78)	87.0 (221)	41.5 (105)	60.5 (154)	60.8 (154)	71.0 (180)	4.0 (10)	9.8 (25)
3500	34.5 (88)	97.5 (248)	52.0 (133)	70.0 (178)	60.8 (154)	81.3 (207)	7.0 (18)	8.3 (21)
4000	34.5 (88)	97.5 (248)	52.0 (133)	70.0 (178)	60.8 (154)	81.3 (207)	7.0 (18)	8.3 (21)

inches (cm)

Model	K	N	P	Q	R	S	T	U
1600	67.4 (171)	30.4 (77)	16.0 (41)	23.0 (58)	10.2 (26)	14.0 (36)	13.0 (33)	6.3 (16)
2000	67.4 (171)	30.4 (77)	16.0 (41)	23.0 (58)	10.2 (26)	14.0 (36)	13.0 (33)	6.3 (16)
2500	76.4 (194)	34.5 (88)	17.7 (45)	27.2 (69)	11.8 (30)	18.3 (46)	14.8 (38)	6.0 (15)
3000	76.8 (195)	34.5 (88)	17.7 (45)	27.2 (69)	11.8 (30)	18.3 (46)	14.8 (38)	6.0 (15)
3500	86.4 (219)	40.0 (102)	21.6 (55)	30.7 (78)	13.0 (33)	16.0 (41)	17.4 (44)	6.7 (17)
4000	86.4 (219)	40.0 (102)	21.6 (55)	30.7 (78)	13.0 (33)	16.0 (41)	17.4 (44)	6.7 (17)


inches (cm)

Model	*Vent Collar Diameter	*Air Inlet Collar Diameter	*Knockdown Height	Water Connection
1600	6 (15)	6 (15)	60.8 (154)	3" groove lock (opt. flange)
2000	8 (20)	8 (20)	60.8 (154)	3" groove lock (opt. flange)
2500	8 (20)	8 (20)	70.1 (180)	3" groove lock (opt. flange)
3000	10 (25)	10 (25)	70.1 (180)	3" groove lock (opt. flange)
3500	10 (25)	10 (25)	80.8 (205)	4" groove lock (opt. flange)
4000	12 (30)	12 (30)	80.8 (205)	4" groove lock (opt. flange)

* Collar dimension only.
Refer to section 1.G for vent and air pipe sizes.

inches (cm)

MAGNATHERM® HTD

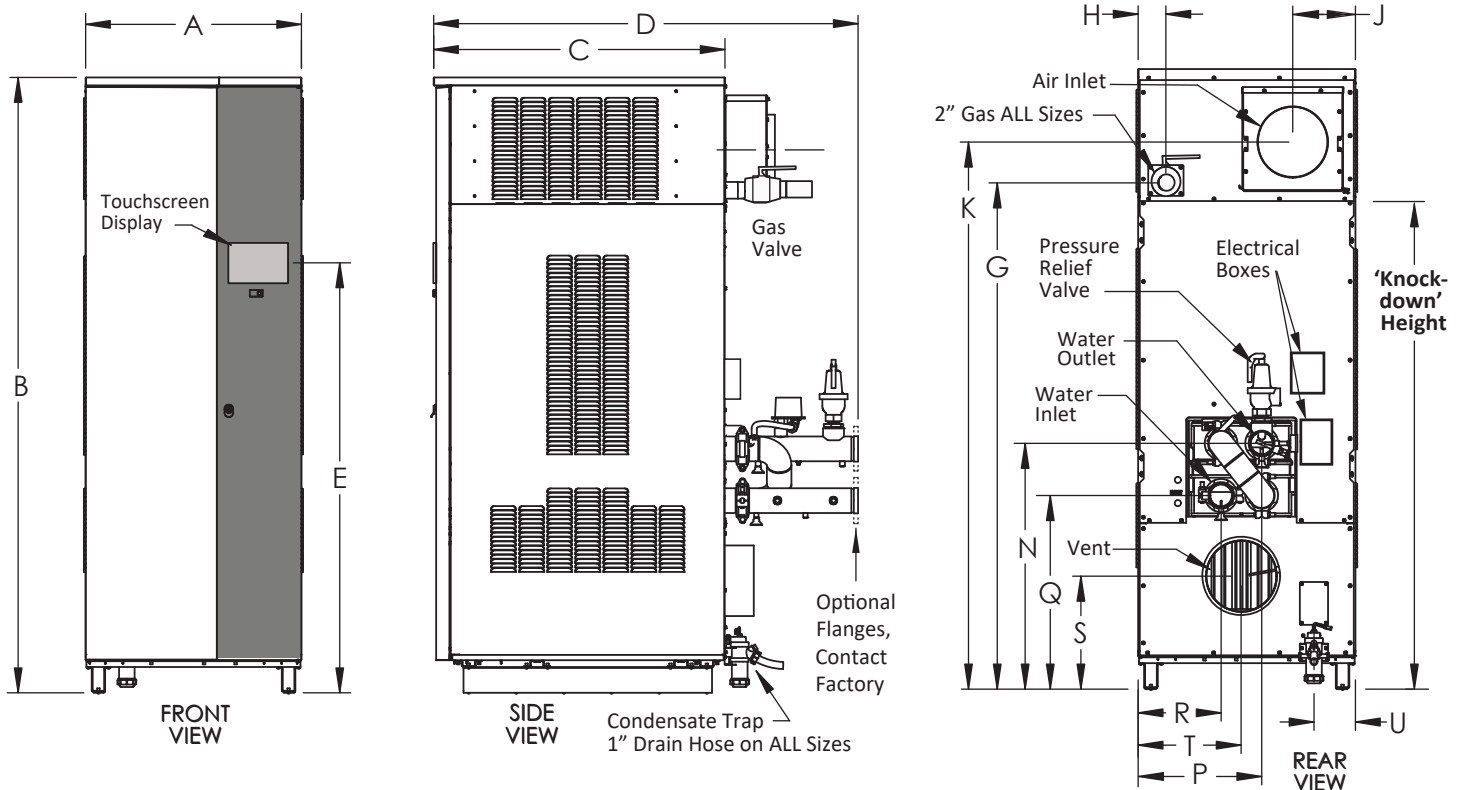

Laars Heating Systems Company reserves the right to change specifications, components, features, or to discontinue products without notice.