



Expansion Bladder Tanks

Submittal Data

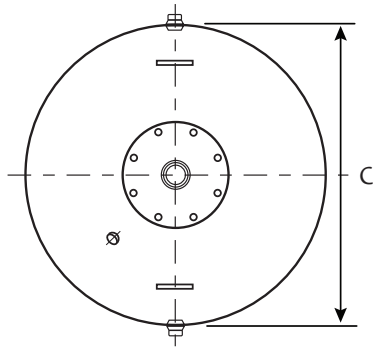

Bladder tanks are factory charged at 12 psi.
 Dried to -50 dew point
 For use with non-potable water
 Heavy duty replaceable bladder
 Max temperature 240 degrees F
 Red oxide primer paint
 Large flanged opening for easy bag replacement
 Carbon steel construction
 Can be used with glycol systems
 ASME code Sec VIII, Div 1
 1 Year warranty

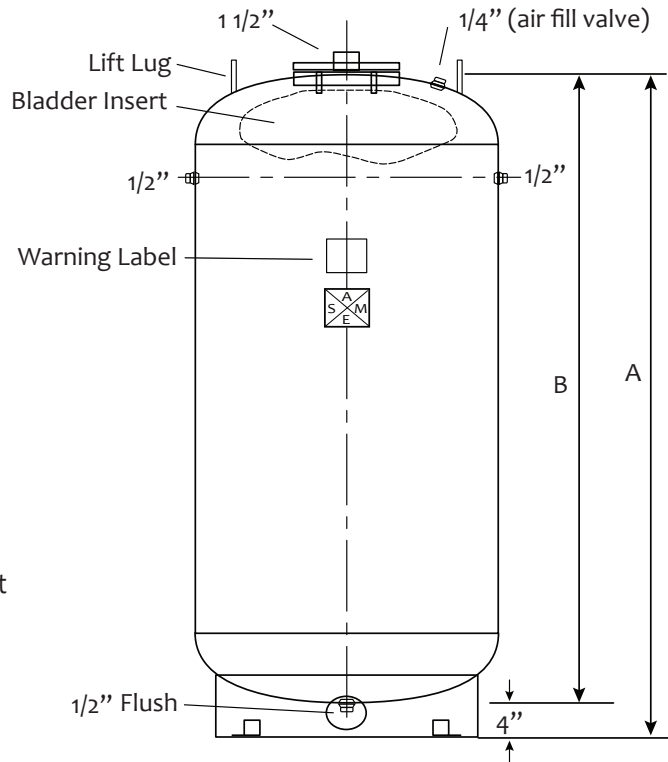

Model	Gallons	(A) Overall Height	(B) Tank Height	(C) Diameter	System connection	Working Pressure	Weight
LEBT-30-063	175	67"	63"	30"	1-1/2"	125	465
LEBT-30-075	210	79"	75"	30"	1-1/2"	125	505
LEBT-30-085	240	89"	85"	30"	1-1/2"	125	550
LEBT-36-072	285	76"	72"	36"	1-1/2"	125	675
LEBT-36-078	310	82"	78"	36"	1-1/2"	125	700
LEBT-36-085	340	89"	85"	36"	1-1/2"	125	750
LEBT-36-090	360	94"	90"	36"	1-1/2"	125	780
LEBT-42-081	435	85"	81"	42"	1-1/2"	125	1186
LEBT-42-084	453	88"	84"	42"	1-1/2"	125	1216
LEBT-42-093	505	97"	93"	42"	1-1/2"	125	1304
LEBT-48-073	500	77"	73"	48"	1-1/2"	125	1293
LEBT-48-096	675	100"	96"	48"	1-1/2"	125	1550
LEBT-48-108	765	112"	108"	48"	1-1/2"	125	1685
LEBT-48-120	860	124"	120"	48"	1-1/2"	125	1870
LEBT-48-141	1040	145"	141"	48"	1-1/2"	125	1870

LAARS
 Heating Systems Company
 A subsidiary of **BRADFORD WHITE** Corporation

International Sales
 1869 Sismet Road, Mississauga
 Ontario, Canada L4W 1W8
 905.238.0100 • Fax 905.366.0130

Headquarters
 20 Industrial Way, Rochester, NH 03867
Sales, Service
 800.900.9276 • Fax 800.559.1583
Applications Engineering
 603.335.6300 • Fax 603.335.3355

www.Laars.com
 Litho in U.S.A. © Laars Heating Systems 1501 Document 4282